


Interchangeable Heads – Open End "Big Head" – Centre Line 3 7/8"

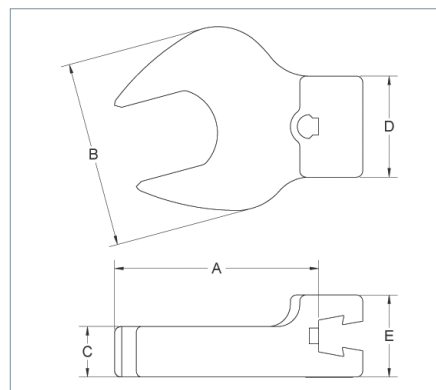

- ▶ Opening with 15° offset.
- ▶ SR dovetail connector with outstanding **rigidity** and wear resistance.
- ▶ **One-piece cast** alloy-steel, black finish.
- ▶ **Centre Line 3 7/8"** (~98,4 mm)
- ▶ Suitable with dovetail torque wrench series
 - ✓ LTC
 - ✓ SLTC / SLTC-FM
 - ✓ TAC
 - ✓ CCM model 400 Nm rsp. 300 Ft.lb and above.

Assembling heavy equipment isn't for everyone. It takes more than strength, durability, and brain power. It takes a big head – a big interchangeable head on the end of your Sturtevant Richmond wrench. Maintaining heavy equipment isn't for everyone. Maintaining heavy equipment requires the right tools for the job. The same tools used to build the equipment are the right tools to use to maintain that equipment.

Engineered for consistency in every way including the 3 7/8 common centerline so you don't have to recalibrate the wrench to accommodate a different head length. Now you can go from a 33 mm head to a 60 mm or a 1 5/16 inch to a 3 inches with just ONE wrench.

Like all Sturtevant Richmond interchangeable heads, this open-end series consists of one piece cast heads that are made from a proprietary metal formula. The rounded corners distribute the stress vectors so they don't all intersect at one point and create breakage. The same applies to the U-bottom design. The rounded bottom distributes the stress vectors and that improves durability. Our heads all come with a torque rating clearly shown on the head.

INFO

Big OE – metric

Model	Item No.	A/F mm	max N-m	Dimensions mm				
				A	B	C	D	E
OE-33MM	R819761	33	350	117.5	74.6	15.8	38.1	25.4
OE-34MM	R819762	34	350	117.5	74.6	15.8	38.1	25.4
OE-35MM	R819763	35	350	117.1	74.6	15.8	38.1	25.4
OE-36MM	R819766	36	350	117.1	74.6	15.8	38.1	25.4
OE-37MM	R819764	37	350	116.7	74.6	15.8	38.1	25.4
OE-38MM	R819765	38	350	116.7	74.6	15.8	38.1	25.4
OE-40MM	R819771	40	400	116.7	74.6	15.8	38.1	25.4
OE-41MM	R819755	41	400	116.7	74.6	15.8	38.1	25.4
OE-42MM	R819769	42	400	115.9	74.6	15.8	38.1	25.4
OE-44MM	R819774	44	400	125.4	110.3	15.8	38.1	25.4
OE-46MM	R853545	46	400	125.4	110.3	15.8	38.1	25.4
OE-48MM	R819770	48	400	124.6	110.3	15.8	38.1	25.4
OE-50MM	R819756	50	400	125.0	110.3	15.8	38.1	25.4
OE-55MM	R819757	55	400	124.2	110.3	15.8	38.1	25.4
OE-60MM	R819753	60	400	123.4	110.3	15.8	38.1	25.4

Big OE – inch

Model	Item No.	A/F inch	max lbf-in	Dimensions mm				
				A	B	C	D	E
OE-1 5/16	R819724	1 5/16	3100	117.5	74.6	15.8	38.1	25.4
OE-1 3/8	R819725	1 3/8	3100	117.1	74.6	15.8	38.1	25.4
OE-1 7/16	R819726	1 7/16	3100	117.1	74.6	15.8	38.1	25.4
OE-1 1/2	R819727	1 1/2	3100	116.7	74.6	15.8	38.1	25.4
OE-1 9/16	R819728	1 9/16	3540	116.3	74.6	15.8	38.1	25.4
OE-1 5/8	R819729	1 5/8	3540	115.9	74.6	15.8	38.1	25.4
OE-1 11/16	R819730	1 11/16	3540	115.9	74.6	15.8	38.1	25.4
OE-1 3/4	R819731	1 3/4	3540	115.5	74.6	15.8	38.1	25.4
OE-1 13/16	R819732	1 13/16	3540	114.7	74.6	15.8	38.1	25.4
OE-1 7/8	R819733	1 7/8	3540	125.4	110.3	15.8	38.1	25.4
OE-1 15/16	R819734	1 15/16	3540	125.2	110.3	15.8	38.1	25.4
OE-2	R819735	2	3540	125.0	110.3	15.8	38.1	25.4
OE-2 1/16	R819736	2 1/16	3540	124.6	110.3	15.8	38.1	25.4
OE-2 1/8	R819737	2 1/8	3540	124.6	110.3	15.8	38.1	25.4
OE-2 3/16	R819738	2 3/16	3540	124.5	110.3	15.8	38.1	25.4
OE-2 1/4	R819739	2 1/4	3540	123.8	110.3	15.8	38.1	25.4
OE-2 5/16	R819740	2 5/16	3540	121.9	110.3	15.8	38.1	25.4
OE-2 3/8	R819741	2 3/8	3540	123.4	110.3	15.8	38.1	25.4
OE-2 7/16	R819742	2 7/16	4800	123.0	110.3	15.8	38.1	25.4
OE-2 1/2	R819743	2 1/2	4800	122.6	110.3	15.8	38.1	25.4
OE-2 9/16	R819744	2 9/16	4800	122.2	110.3	15.8	38.1	25.4
OE-2 5/8	R819745	2 5/8	4800	121.8	110.3	15.8	38.1	25.4
OE-2 11/16	R819746	2 11/16	4800	139.3	142.9	15.8	38.1	25.4
OE-2 3/4	R819747	2 3/4	4800	139.3	142.9	15.8	38.1	25.4



Further info on our website.
24/7

* Indicates special order with minimum of four (4) per order.

All specifications without guarantee, errors and omissions excepted.

TEL: +49(0)40 303 989 100 • FAX: +49(0)40 303 989 101 • MAIL: info@zemo-tools.de