


## Interchangeable Heads – Open End "Big Head" (CCL 98.4 mm)

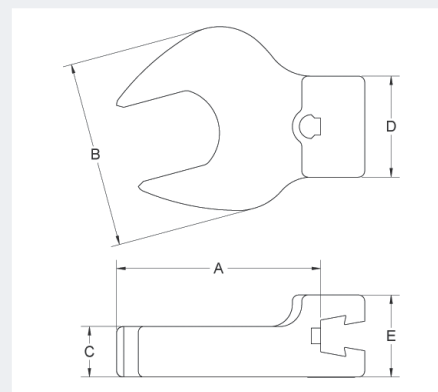

- ▶ Opening with 15° offset.
- ▶ Sturtevant Richmond dovetail connector with outstanding rigidity and wear resistance.
- ▶ **One-piece cast** alloy-steel, black finish.
- ▶ **Centre Line 3 7/8 inch** (~98.4 mm).
- ▶ Suitable with dovetail torque wrench series
  - ✓ LTC
  - ✓ SLTC / SLTC-FM
  - ✓ TAC
  - ✓ CCM model 400 Nm rsp. 300 Ft.lb and above

*Like all Sturtevant Richmond interchangeable heads, this open-end series consists of one piece cast heads that are made from a proprietary metal formula. The rounded corners distribute the stress vectors so they don't all intersect at one point and create breakage. The same applies to the U-bottom design. The rounded bottom distributes the stress vectors and that improves durability. Our heads all come with a torque rating clearly shown on the head.*

**INFO**

### Big OE – metric

| Model   | Item No. | A/F mm | max N-m | Dimensions mm |       |      |      |      |
|---------|----------|--------|---------|---------------|-------|------|------|------|
|         |          |        |         | A             | B     | C    | D    | E    |
| OE-33MM | R819761  | 33     | 350     | 117.5         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-34MM | R819762  | 34     | 350     | 117.5         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-35MM | R819763  | 35     | 350     | 117.1         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-36MM | R819766  | 36     | 350     | 117.1         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-37MM | R819764  | 37     | 350     | 116.7         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-38MM | R819765  | 38     | 350     | 116.7         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-40MM | R819771  | 40     | 400     | 116.7         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-41MM | R819755  | 41     | 400     | 116.7         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-42MM | R819769  | 42     | 400     | 115.9         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-44MM | R819774  | 44     | 400     | 125.4         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-46MM | R853545  | 46     | 400     | 125.4         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-48MM | R819770  | 48     | 400     | 124.6         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-50MM | R819756  | 50     | 400     | 125.0         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-55MM | R819757  | 55     | 400     | 124.2         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-60MM | R819753  | 60     | 400     | 123.4         | 110.3 | 15.8 | 38.1 | 25.4 |

Assembling heavy equipment isn't for everyone. It takes more than strength, durability, and brain power. It takes a big head – a big interchangeable head on the end of your Sturtevant Richmond wrench.

Engineered for consistency in every way including the 3 7/8 common centerline so you don't have to recalibrate the wrench to accommodate a different head length. Now you can go from a 33 mm head to a 60 mm or a 1 5/16 inch to a 3 inches with just ONE wrench.

### Big OE – inch

| Model        | Item No. | A/F inch | max lbf-in | Dimensions mm |       |      |      |      |
|--------------|----------|----------|------------|---------------|-------|------|------|------|
|              |          |          |            | A             | B     | C    | D    | E    |
| OE-1 5/16    | R819724  | 1 5/16   | 3100       | 117.5         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-1 3/8     | R819725  | 1 3/8    | 3100       | 117.1         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-1 7/16    | R819726  | 1 7/16   | 3100       | 117.1         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-1 1/2     | R819727  | 1 1/2    | 3100       | 116.7         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-1 9/16    | R819728  | 1 9/16   | 3540       | 116.3         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-1 5/8     | R819729  | 1 5/8    | 3540       | 115.9         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-1 11/16   | R819730  | 1 11/16  | 3540       | 115.9         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-1 3/4     | R819731  | 1 3/4    | 3540       | 115.5         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-1 13/16   | R819732  | 1 13/16  | 3540       | 114.7         | 74.6  | 15.8 | 38.1 | 25.4 |
| OE-1 7/8     | R819733  | 1 7/8    | 3540       | 125.4         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-1 15/16   | R819734  | 1 15/16  | 3540       | 125.2         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-2         | R819735  | 2        | 3540       | 125.0         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-2 1/16    | R819736  | 2 1/16   | 3540       | 124.6         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-2 1/8     | R819737  | 2 1/8    | 3540       | 124.6         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-2 3/16    | R819738  | 2 3/16   | 3540       | 124.5         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-2 1/4     | R819739  | 2 1/4    | 3540       | 123.8         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-2 5/16    | R819740  | 2 5/16   | 3540       | 121.9         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-2 3/8     | R819741  | 2 3/8    | 3540       | 123.4         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-2 7/16    | R819742  | 2 7/16   | 4800       | 123.0         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-2 1/2     | R819743  | 2 1/2    | 4800       | 122.6         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-2 9/16    | R819744  | 2 9/16   | 4800       | 122.2         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-2 5/8     | R819745  | 2 5/8    | 4800       | 121.8         | 110.3 | 15.8 | 38.1 | 25.4 |
| OE-2 11/16   | R819746  | 2 11/16  | 4800       | 139.3         | 142.9 | 15.8 | 38.1 | 25.4 |
| OE-2 3/4     | R819747  | 2 3/4    | 4800       | 139.3         | 142.9 | 15.8 | 38.1 | 25.4 |
| OE-2 13/16 * | R819748  | 2 13/16  | 4800       | 139.3         | 142.9 | 15.8 | 38.1 | 25.4 |
| OE-2 7/8 *   | R819749  | 2 7/8    | 4800       | 139.3         | 152.4 | 15.8 | 38.1 | 25.4 |
| OE-2 15/16 * | R819750  | 2 15/16  | 4800       | 139.3         | 152.4 | 15.8 | 38.1 | 25.4 |
| OE-3 *       | R819751  | 3        | 4800       | 139.3         | 152.4 | 15.8 | 38.1 | 25.4 |
| OE-3 1/4 *   | R819752  | 3 1/4    | 4800       | 137.3         | 152.4 | 15.8 | 38.1 | 25.4 |



Further  
info on our  
website.  
24/7

\* Custom-made on request. Minimum order quantity 4 pieces per order.

All specifications without guarantee, errors and omissions excepted.

TEL: +49(0)40 303 989 100 • EML: info@zemo-tools.de • WEB: www.zemo-tools.de

**ZEMO**  
www.zemo-tools.de