

Interchangeable Heads (Rectangle) – Flare Nut



Interchangeable flare nut head with 9×12 mm rectangular insert connector. The attachment is secured by a spring-loaded retaining pin. The load capacity depends on the width across flats and may be less than the capacity of the torque wrench used.

- ▶ Rectangular connection 9×12 mm.
- ▶ Locking by means of spring pin.
- ▶ Centre distance depending on model.
- ▶ Forged alloy steel, partially chrome plated.



Interchangeable open-end flare nut head with 9×12 mm rectangular insert connector. Custom-made SFN with stop (shoulder) and centre distance 36.5 mm. The attachment is secured by a spring-loaded retaining pin.

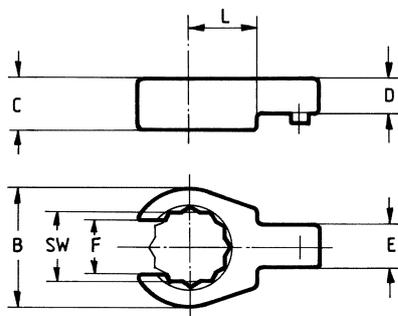
The load capacity depends on the width across flats and may be less than the capacity of the torque wrench used.

- ▶ Rectangular connection 9×12 mm.
- ▶ Locking by means of spring pin.
- ▶ Centre distance 36.5 mm.
- ▶ Forged alloy steel, partially chrome plated.

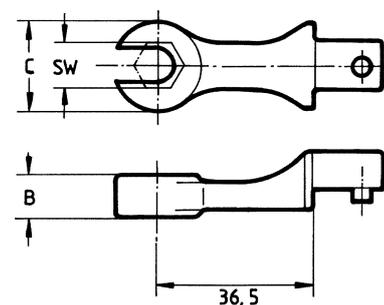
INFO

Tool attachments with the same centre distance can be interchanged without having to reset the torque wrench.

However, when replacing the head with a different centre distance, the torque must be readjusted each time!


S9-FN

Model	Item No.	A/F mm	Dimensions [mm]			
			B	C	F	L
S9-FN 10	R716101	10	21.5	11	7.1	17.5
S9-FN 11	R716102	11	22.5	11	8.6	17.5
S9-FN 12	R716103	12	24	12.5	9	17.5
S9-FN 13	R716104	13	26	12	10	17.5
S9-FN 14	R716105	14	27	13	11	17.5
S9-FN 16	R716107	16	30.5	13	13	17.5
S9-FN 17	R716108	17	31.5	13	14	17.5
S9-FN 18	R716109	18	33	15	14.8	17.5
S9-FN 19	R716110	19	34	15	15.8	17.5
S9-FN 21	R716112	21	38.5	15	16.2	20
S9-FN 22	R716111	22	39.5	15	17	20
S9-FN 24	R716113	24	40	15	18	20


S9-SFN

Model	Item No.	A/F mm	max. N-m	Dimensions [mm]	
				B	C
S9-SFN 10	R712960	10	19	12	19
S9-SFN 11	R712961	11	20	12	20
S9-SFN 12	R712962	12	22	12	22
S9-SFN 13	R712963	13	25	12	23
S9-SFN 14	R712964	14	30	12	25
S9-SFN 17	R712965	17	35	13	28
S9-SFN 19	R712966	19	40	13	31



Further
info on our
website.
24/7