




# Bit-Holders – for non-powered/powered screwdrivers \*



## C6.3 Bit holder – Snap ring

Model	Item No.	drive size	L mm	Ø mm	Pk
BR6.3-E6.3-58	119010	E 6.3	58	11.2	5
BR6.3-G7-46	119013	G 7	46	11.2	5



## C6.3 Bit holder – Stainless steel – Magnet – Snap ring

Model	Item No.	drive size	L mm	Ø mm	Pk
BRM6.3-E6.3-50	119112	E 6.3	51	10	5
BRM6.3-E6.3-60	119119	E 6.3	58	10	5
BRM6.3-E6.3-75	119110	E 6.3	75	10	5
BRM6.3-E6.3-100	119113	E 6.3	102	10	5
BRM6.3-E6.3-150	119114	E 6.3	152	10	5
BRM6.3-E6.3-200	119121	E 6.3	200	10	5
BRM6.3-E6.3-250	119122	E 6.3	250	10	5
BRM6.3-E6.3-300	119123	E 6.3	300	10	5
BRM6.3-G7-75	119115	G 7	75	10	5
BRM6.3-A5.5-70	119116	A 5.5	72	9.5	5
BRM6.3-SDS-75	119117	SDS-plus®	75	11	5




## C6.3 Quick-change holder – Magnet – Snap ring

Model	Item No.	drive size	L mm	Ø mm	Pk
BRQM6.3-E6.3-51	119211	E 6.3	51	14.3	5
BRQM6.3-SDS-80	119214	SDS-plus®	80	14.3	5



## Combi Quick-change holder – Magnet – Snap ring

Model	Item No.	drive size	L mm	Ø mm	Pk
BRKM6.3-E6.3-60	119450	E 6.3	60	14.3	5
BRKM6.3-E6.3-75	119451	E 6.3	75	14.3	5
BRKM6.3-E6.3-150	119452	E 6.3	150	14.3	5




## C6.3 Bit holder – CoBe sleeve – Magnet – Snap ring

Model	Item No.	drive size	L mm	Ø mm	Pk
BRCU6.3-E6.3-74	119310	E 6.3	75	10.8	5



### Benefits of the combi bit holder

- Can be used with both 1/4 inch bit drives form C 6.3 and E 6.3.
- Flexibility in pick-up means that the user always has the right holder to hand.
- The quick-change mechanism ensures a firm and wobble-free connection to the drive unit.
- Quick tool change saves time and money.
- High quality ensures long tool life.

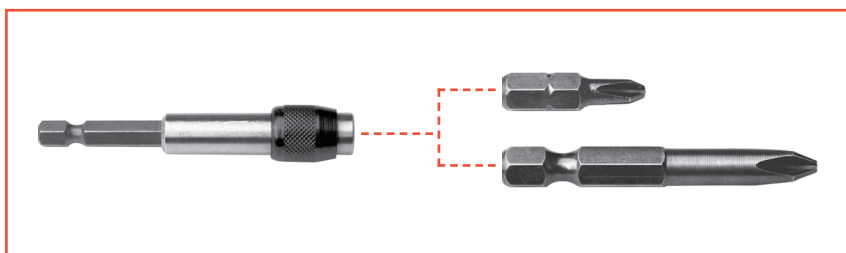

For more info, visit our website.

24 / 7

\* For direct machine connection, see table „Assignment of tool drive and machine“ cat. p. 72.

Mail: info@zemo-tools.de • Phone: +49 (0)40 303 989 100 • Web: www.zemo-tools.de

**ZEMO**  
www.zemo-tools.de