



857322 - CARTON 857330 - INSTRUCTIONS

10615 (1)


RADIO KIT 2.4GHz; AAA FOR SLTC-FM WRENCHES (INCLUDES AAA BATTERY HOUSING UPPER & LOWER COVERS, BATTERY HOUSING LID, RADIO 2.4GHz AAA, RUBBER WASHERS (4), SCREW PAN HEAD (2), LITEPIPE & SPRING CLIP, PCB INSULATION, SLTC LABEL, & AAA BATTERY)


## NOTES:


 TIGHTEN TO 1.5-2.5 IN. LBS. AND APPLY A DROP OF ADHESIVE (PERMA-LOK MM115 OR LOCTITE 262) TO SET SCREW (890105) PRIOR TO ASSEMBLY INTO TANG (813326).


<u>WARNING:</u> USE ONLY 1.5 VDC ALKALINE OR 1.2 VDC NIMH AAA RECHARGEABLE BATTERIES. OTHER BATTERIES CAN CAUSE DAMAGE TO THE BOARD AND IMPACT RADIO SIGNAL.

816799 - THIS PIN IS FORMED OVER <u>CUSTOMER MUST</u> GRIND OFF FORMED END& INSTALL THIS PIN FORMING THE HEADOVER THE RETAINING RING AS SHOWN.

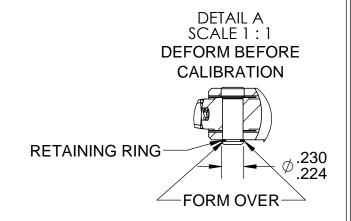

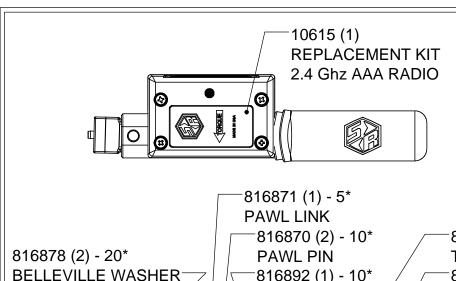

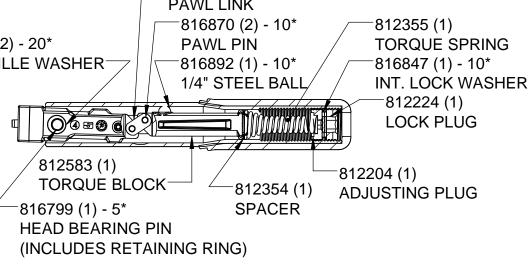

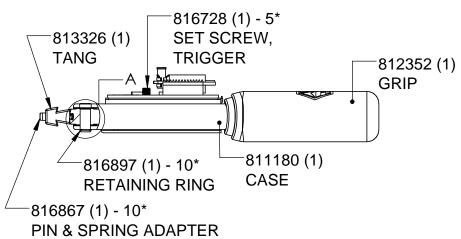

STURTEVANT RICHMONT ®

TORQUE MEASUREMENT SYSTEMS

DIVISION OF RYESON CORPORATION

THIS PRINT AND ALL INFORMATION APPEARING THEREON IS THE PROPERTY OF "STURTEVANT RICHMONT". NEITHE THE PRINT NOR THE INFORMATION THEREON MAY BE REPRODUCED OR USED IN ANY MANNER WHATSOEVER ODIVULGED TO ANY OTHER PERSON UNLESS SPECIFIC ALL

DESCRIPTION

SLTC-2.4FM-50I A3

DIAGRAM No REV.

810411

Α