



**Sturtevant
Richmont**



PM-15

Preset Screwdriver


PM

Series

If we preset the torque value at the factory, we include a Calibration Certificate.

If we do not preset the torque value, you may request a Calibration Certificate.

- Perfect for assembly of electronic components and precision mechanical products!
- Ideal for use in field maintenance kits - electro-static discharge compliant when ESD practices are used.
- Clutch releases automatically when preset torque attained - no overtorquing.
- Anti-backlash design for repeatability.
- Long shaft allows operator to reach limited-access applications.
- Accuracy of +/- 6% (from 20% to 100% of capacity) meets or exceeds ASME B107.300 - 2010 and ISO 6789 requirements.
- Bi-directional versatility - CW and CCW operation.
- Uses standard bits, adapters, and sockets.
- Torque value can be set using any unit of torque measure.

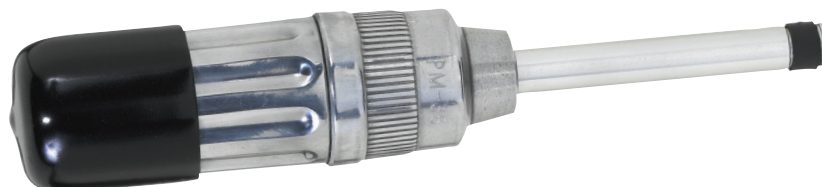

PM-36

Specifications

Capacity

Length (less bit)

Grip Diameter

Grip Length

Weight

Drive Size

PM-5

Part No. 810007

20-100 in. oz.

1.25-6.25 in. lb.

5.2656"

0.7656"

3"

0.25 lb.

1/4" Female Hex

PM-15

Part No. 810064

48-240 in. oz.

3-15 in. lb.

6.3281"

1.0313"

3"

0.3 lb.

1/4" Female Hex

PM-36

Part No. 810563

115.2-576 in. oz.

7.2-36 in. lb.

7.1563"

1.2344"

0.5 lb.

1/4" Female Hex

Color code all your screwdrivers

When you place your order, just mention you want colors and we will send a package of five easy-to-apply heat shrink sleeves. Color code bands are 1/2" in length.

Part No.

816734

816735

816736

816737

816738

816739

Package Contents

Multi-color (1 each)

Blue (5)

Yellow (5)

Red (5)

White (5)

Green (5)



PM-5

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 61