

Kraftsteckschlüssel mit 2 1/2" Vierkantantrieb nach DIN 3121 H 63



Sechskant – normal

Modell	Best.-Nr.	SW mm	L mm	D1 mm	D2 mm	L2 mm	VE
K2.1/2-60	280010	60	125	99	127	37	–
K2.1/2-65	280011	65	130	105	127	40	–
K2.1/2-70	280012	70	130	110	127	40	–
K2.1/2-75	280013	75	140	118	127	42	–
K2.1/2-80	280015	80	140	124	127	45	–
K2.1/2-85	280016	85	140	130	127	52	–
K2.1/2-90	280017	90	145	136	127	52	–
K2.1/2-95	280018	95	145	143	127	52	–
K2.1/2-100	280019	100	150	149	127	58	–
K2.1/2-105	280020	105	155	155	127	58	–
K2.1/2-110	280021	110	160	161	127	60	–
K2.1/2-115	280022	115	165	167	127	62	–
K2.1/2-120	280023	120	170	176	127	67	–
K2.1/2-125	280024	125	175	184	127	72	–
K2.1/2-130	280025	130	175	188	152	72	–
K2.1/2-135	280026	135	180	195	152	77	–
K2.1/2-140	280027	140	180	204	152	77	–
K2.1/2-145	280028	145	185	207	152	83	–
K2.1/2-150	280029	150	185	214	152	83	–
K2.1/2-155	280030	155	190	224	152	90	–
K2.1/2-160	280031	160	190	227	152	90	–
K2.1/2-165	280032	165	195	234	152	95	–
K2.1/2-170	280033	170	195	244	152	95	–
K2.1/2-175	280034	175	200	247	152	100	–
K2.1/2-180	280035	180	200	254	152	100	–
K2.1/2-185	280036	185	210	257	152	105	–
K2.1/2-190	280037	190	210	265	152	105	–
K2.1/2-200	280038	200	220	275	152	110	–



Sechskant – normal – Zoll

Modell	Best.-Nr.	SW Zoll	L mm	D1 mm	D2 mm	L2 mm	VE
K2.1/2-3	280001	3	140	120	127	45	–
K2.1/2-3.1/8	280002	3 1/8	140	124	127	45	–
K2.1/2-3.1/2	280003	3 1/2	140	135	127	52	–
K2.1/2-3.7/8	280004	3 7/8	150	147	127	58	–
K2.1/2-4.1/4	280005	4 1/4	160	159	127	60	–



Gummiring & Sicherungsstift

Modell	Best.-Nr.	Größe Zoll	–	D1 mm	D2 mm	–	VE
RS-2.1/2	280050	2 1/2	–	–	–	–	5

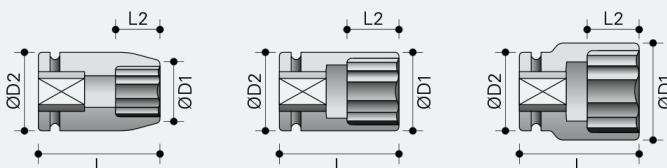

Weitere Infos
auf unserer
Website.
24/7

ZEMO
www.zemo-tools.de