Interchangeable Heads (DIN) – Flare Nut

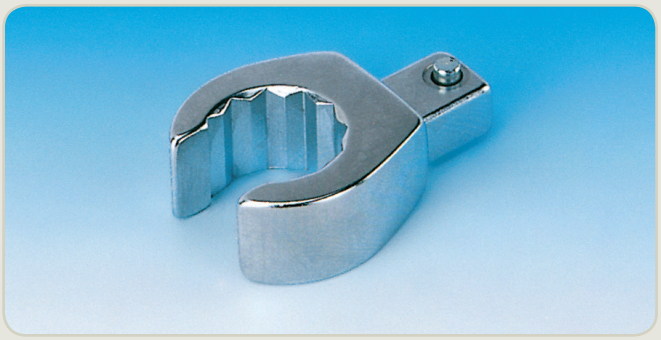

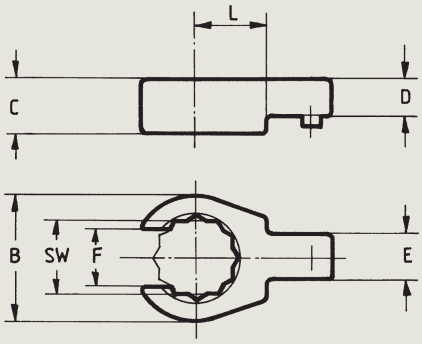

Interchangeable flare nut head with DIN rectangle connector 9×12 mm. The head is secured by a spring-loaded lock pin.

The load capacity is dependent on the width A/F and may be less than the capacity of the used clicker wrench.

Interchangeable heads with the same centre line may be interchanged among themselves arbitrarily, without needing the torque wrench to be adjusted again. Vice versa, when interchanging heads with differing centre lines, the torque wrench must be individually adjusted in each case!

- DIN rectangle insert 9×12 mm.
- Secured by spring-loaded lock pin.
- Centre line 17.5 mm.
- Forged alloy steel, chrome plated.

Recommended for use with S/R preset torque wrenches series TC.

S9-FN

Model	Item No.	A/F	Dimensions mm				Price	PG
		mm	B	C	F	L	€	
S9-FN 10	R716101	10	21	12	7	17.5		15
S9-FN 11	R716102	11	23	12	9	17.5		15
S9-FN 12	R716103	12	24	12	9	17.5		15
S9-FN 13	R716104	13	24	12	10	17.5		15
S9-FN 14	R716105	14	25	13	11	17.5		15
S9-FN 17	R716108	17	32	13	14	17.5		15
S9-FN 18	R716109	18	33	15	15	17.5		15
S9-FN 19	R716110	19	35	15	16	17.5		15
S9-FN 22	R716111	22	39	15	17	17.5		15
S9-FN 24	R716112	24	42	15	18	17.5		15

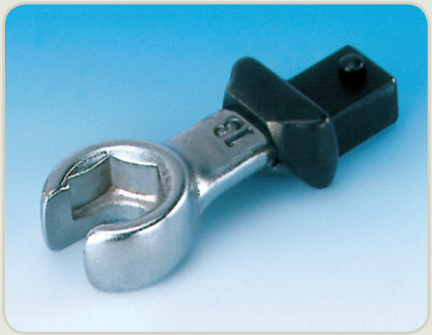

Special manufactured S9-SFN (with shoulder) for centre line 36.5 mm available in several sizes.

Model	Item No.	A/F	max.	Dimensions mm		Price	PG
		mm	N·m	B	C	€	
S9-SFN 10	R712960	10	19	12	19		17
S9-SFN 11	R712961	11	20	12	20		17
S9-SFN 12	R712962	12	22	12	22		17
S9-SFN 13	R712963	13	25	12	23		17
S9-SFN 14	R712964	14	30	12	25		17
S9-SFN 17	R712965	17	35	13	28		17
S9-SFN 19	R712966	19	40	13	31		17

Prices are valid per unit in Euro plus VAT and/or any custom fees exw Hamburg, incl. package. Errors or alteration excepted.

ZEMO Vertriebs GmbH · Peutestr. 47 · 20539 Hamburg · Tel: +49 (0)40-789181-02 · Fax: +49 (0)40-789181-12 · E-Mail: info@zemo-tools.de